DEMO · FICTITIOUS CONTRACTOR SUBMISSION · NOT AN SPT DOCUMENT

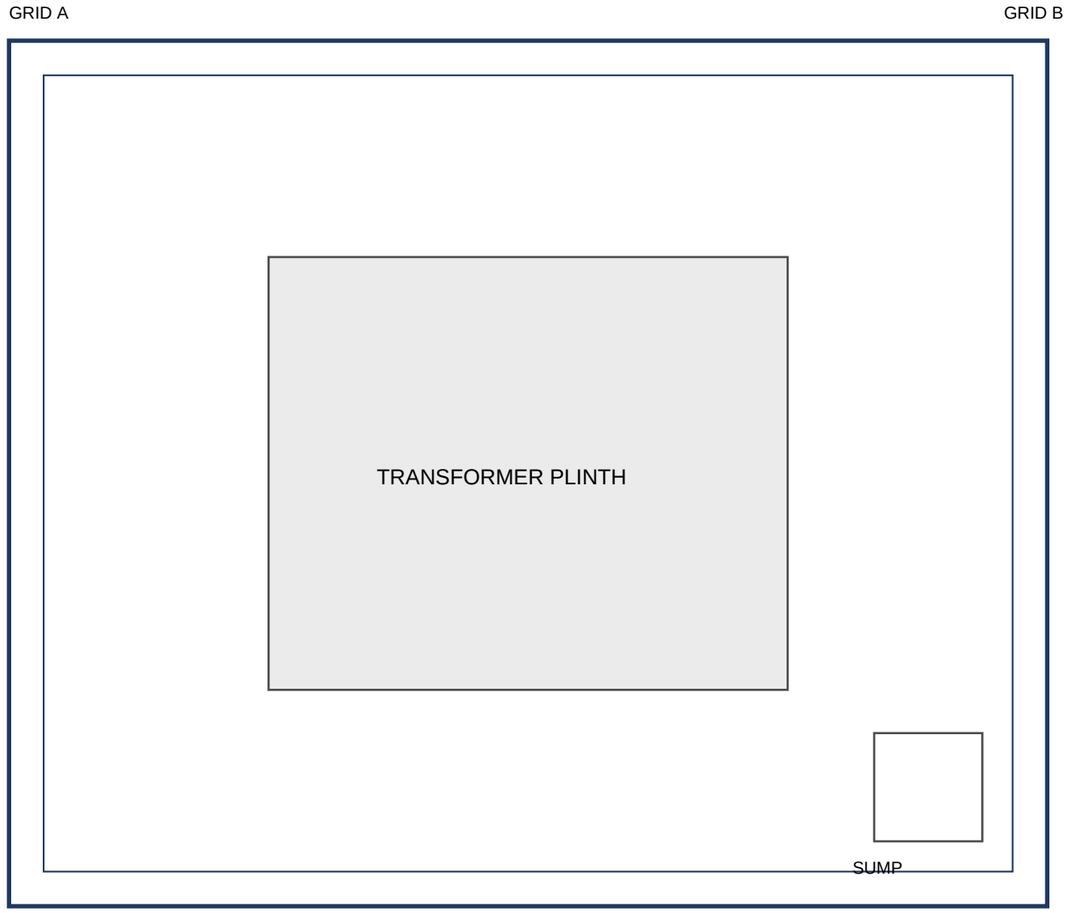

PLAN ON TRANSFORMER BUND SCALE 1:100

GENERAL NOTES

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE. DO NOT SCALE.
2. CONCRETE TO BUND WALLS AND PLINTHS: C32/40 TO BS 8500-1, CEM II/B-V.
3. REINFORCEMENT: B500B TO BS 4449. NOMINAL COVER 50mm.
4. BUND WALL THICKNESS 200mm REINFORCED CONCRETE.
5. BUND CAPACITY: 115% OF TRANSFORMER OIL VOLUME (68,000 LITRES).
6. BUND WALL UPSTAND 300mm ABOVE FINISHED COMPOUND LEVEL.
7. SUMP 900 x 900mm ON PLAN WITH 450mm DOWNSTAND.
8. STONE INFILL: 300mm MINIMUM DEPTH OF RECYCLED 14-20mm ANGULAR STONE.
9. BUND TO BE WATER TESTED ON COMPLETION.

CLIENT	SP TRANSMISSION · EASTERN GREEN LINK 1 (DEMO)
PROJECT	TORNESS 400kV AC COMPOUND
TITLE	TRANSFORMER BUND · GENERAL ARRANGEMENT
DRAWING No.	EGL1-DEMO-CIV-DRG-0101
REVISION	P02
STATUS	FOR ACCEPTANCE
SCALE	1:100 @ A3
DRAWN / CHECKED	DEMO CIVILS LTD